

Juland Electronics 500 Series Switchgauge Installation Instructions - Latest style with connector & loom



- 1 Remove vehicle blank
- 2 Poke free end of loom through hole - leave white connector 4" - 6" free (100mm - 150mm)
- 3 Connect as per diagram (Ensure your switchgauge matches one of the diagrams below)
- 4 Plug connector into Switchgauge
- 5 Test to see it works
- ⇒ Select Petrol = Amber Led Lights up + Power on Yellow
- ⇒ Select Gas = Gauge Lights up + Power on Green Wire
- 6 If gauge Led's are too bright, remove black mini-jumper marked 'L1' (see diagram)
- 7 Plug Switchgauge into hole.

White Wire NOTE:

Connect White Wire to Red for gauge always on

Connect White Wire to Green for gauge on *only* when Gas selected

Juland Electronics P/L... for a quality conversion

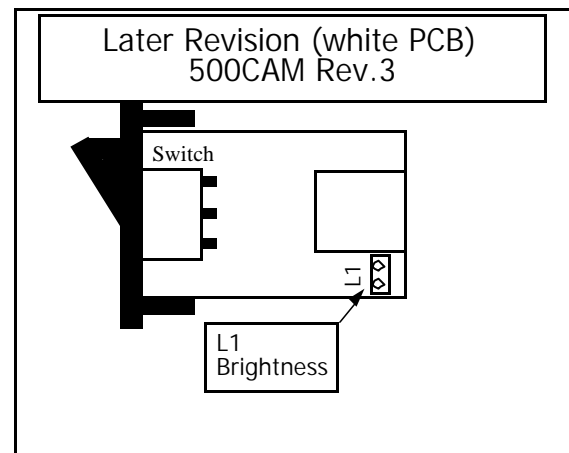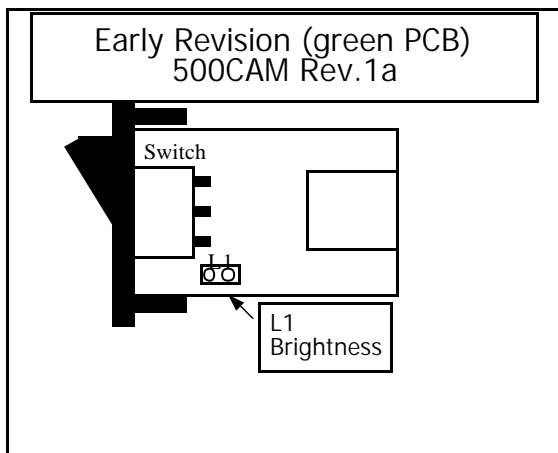

Green Gas	Red Ign.	Yellow Petrol
Blue Sender	White Note:	Black Ground

Rear View

White Wire Note:

- connect White to Green for Gauge on when Gas selected
- connect White wire to Red wire for Gauge always on